


Wickelfalzrohr 3fach Sicke

Spiral folded tubes with reinforcing seam
 Tubes spirales avec triple côte de renforcement

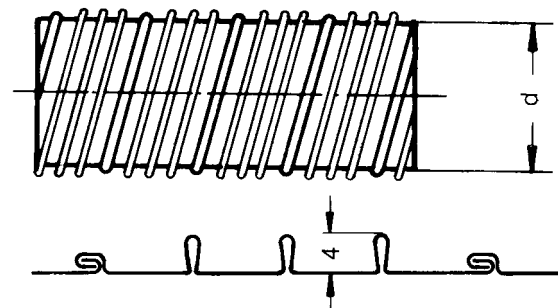

Artikel WRS

Blechdicke		0,4 mm	0,5 mm	0,6 mm	0,8 mm	1,0 mm	1,2 mm	1,5 mm	1,85 mm
d	Oberfläche m ² /m	kg/m	kg/m	kg/m	kg/m	kg/m	kg/m	kg/m	kg/m
63									
71									
80									
90									
100									
112									
125									
140									
150									
160									
180									
200	0,628			3,64	4,85				
224	0,704			4,08	5,44				
250	0,785			4,55	6,07				
280	0,880			5,10	6,79				
300	0,942			5,46	7,28				
315	0,990			5,73	7,64				
355	1,115			6,46	8,61				
400	1,257			7,28	9,71				
450	1,414			8,19	10,92				
500	1,571			9,10	12,13				
560	1,759			10,19	13,59				
600	1,885			10,92	14,56				
630	1,979			11,47	15,29				
710	2,231			12,92	17,23				
800	2,513			14,56	19,41				
900	2,827			16,38	21,84				
1000	3,142			18,20	24,27				
1120	3,519			20,38	27,18				
1250	3,927			22,75	30,33				
1400									
1500									
1600									
1800									

Wickelfalzrohre mit
Flachsicke auf Anfrage

Material	Blechdicken s in mm	Durchmesser d in mm	Längen in mm
sendzimirverzinkt	0,6 - 0,8	200 - 1250	1000 - 7000
andere Längen, Blechdicken und Materialien auf Anfrage			